


Carraro eAxle

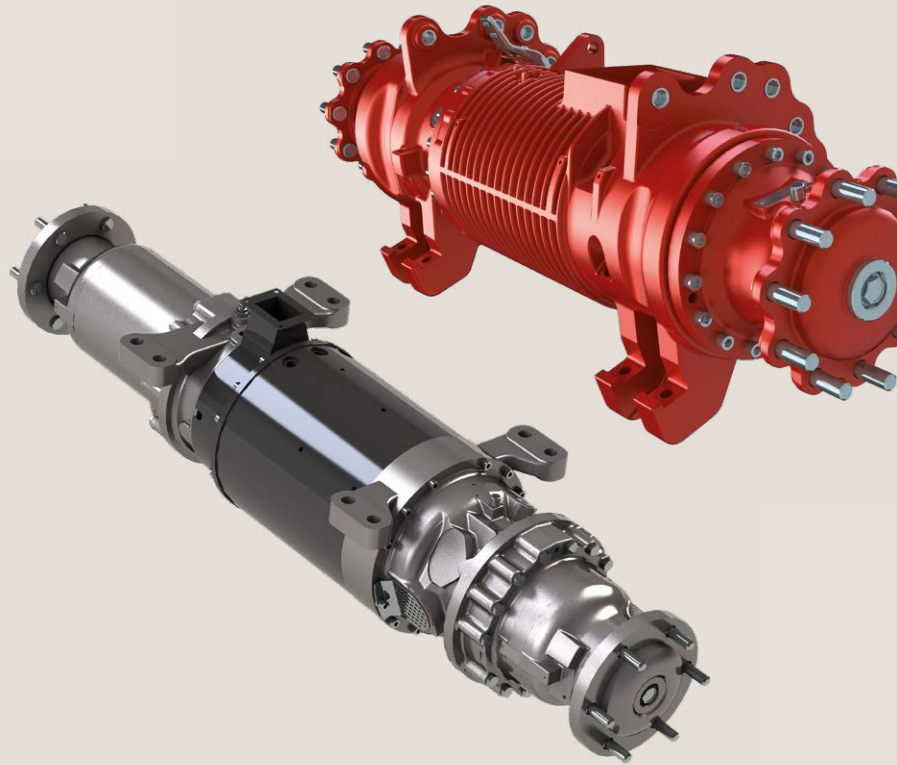

Carraro electrified Vision

P0 / P1

E-motor
linked to ICE

Mild Hybrid Powertrain

Agritechnica
2019
News



P2

E-motor installed
between ICE
and transmission

ibrido



P3

E-motor linked
to the axle through
a dropbox

eTransmission



P4

E-motor installed
in front/rear axle
or in wheels

eAxle



Carraro eAxle

E-motor installed in the front/rear axle or in wheels.

e48.16M

eMotor power	kW	20 - 45
Wheel peak drive torque	kNm	22
Dynamic load capacity	kN	55
Static load capacity	kNm	137

eTB172

eMotor power	kW	15 - 40
Max input torque	Nm	1020
Max input speed	rpm	6000

