

# Torque Converter Transmissions Synchro Shuttle

MAIN TECHNICAL DATA	TCB80 2WD				TCB80 4WD			
Power Rating	82 kW @ 2,200 rpm				82 kW @ 2,200 rpm			
Max input Torque	750 Nm				750 Nm			
Max input speed	2,400 rpm				2,400 rpm			
Internal Pump Type	Gear				Gear			
Engine Flywheel Interface	SAE 3				SAE 3			
Output Flange Type	Yoke 1410				Yoke 1410			
2WD output drop from Engine	180 mm				180 mm			
4WD output drop from Engine	-				323 mm			
Vehicle Pump Interface	SAE C				SAE C			
Torque Converter Size	W300				W300			
Speed Gear	4 Fwd + 4 Rev				4 Fwd + 4 Rev			
Fwd/Rev Ratios Option	1:1 / 1:0.829				1:1 / 1:0.829			
Fwd Speed Gear Ratios	1 <sup>st</sup>	2 <sup>nd</sup>	3 <sup>rd</sup>	4 <sup>th</sup>	1 <sup>st</sup>	2 <sup>nd</sup>	3 <sup>rd</sup>	4 <sup>th</sup>
	5.603:1	3.481:1	1.585:1	0.793:1	5.603:1	3.481:1	1.585:1	0.793:1
MFD Ratio Options	-				0.8:1 / 0.818:1 / 0.895:1			
Electronic Control	No				No			
Reverser	Power Reverse				Power Reverse			
Gear Shifting	Synchro Shuttle				Synchro Shuttle			
Direct Drive Option	Yes				Yes			
MFD Connection Options	-				SAHR Dog Clutch / SAHR Collar Shift / Positive Clutch			
Parking Brake Options	None / SAHR Wet Discs / Manual Wet Discs				None / SAHR Wet Discs / Manual Wet Discs			
Spin-On Oil Filter Options	Horizontal / Vertical / Remote				Horizontal / Vertical / Remote			
Electric System Voltage	12V				12V			
Differential Lock Solenoid	On Control Valve Assy				On Control Valve Assy			
Power Brake in/out Ports	15 bar nom.				15 bar nom.			
Speed Sensor	Available				Available			
Temperature Sensor	Available				Available			
Pressure Sensor	Available				Available			
Electrical Harness	N/A				N/A			

All specifications can be subject to changes without prior advice by Carraro




# Torque Converter Transmissions

## Power Synchro

MAIN TECHNICAL DATA	TCB80 SPS 4WD	TCB80 SPS Coaxial
Power Rating	82 kW @ 2,200 rpm	82 kW @ 2,200 rpm
Max input Torque	750 Nm	750 Nm
Max input speed	2,400 rpm	2,400 rpm
Internal Pump Type	Gear	Gear
Engine Flywheel Interface	SAE 3	SAE 3
Output Flange Type	Yoke 1410	Yoke 1410
2WD output drop from Engine	180 mm	335 mm
4WD output drop from Engine	323 mm	335 mm
Vehicle Pump Interface	SAE C	SAE C
Torque Converter Size	W300	W300
Speed Gear	4 Fwd + 4 Rev	4 Fwd + 4 Rev
Fwd/Rev Ratios Option	1:1 / 1:0.829	1:1 / 1:0.829
FWD Speed Gear Ratios	1 <sup>st</sup> 2 <sup>nd</sup> 3 <sup>rd</sup> 4 <sup>th</sup> 5.603:1   3.481:1   1.585:1   0.793:1	1 <sup>st</sup> 2 <sup>nd</sup> 3 <sup>rd</sup> 4 <sup>th</sup> 5.603:1   3.481:1   1.585:1   0.793:1
MFD Ratio Options	0.8:1 / 0.818:1 / 0.895:1	1:1
Electronic Control	Yes	Yes
Reverser	Power Reverse	Power Reverse
Gear Shifting	Servo Power Synchro	Servo Power Synchro
Direct Drive Option	Yes	Yes
MFD Connection Options	SAHR Dog Clutch / SAHR Wet Clutch / Positive Clutch	Permanent / SAHR Dog Clutch SAHR Wet Clutch
Parking Brake Options	None / SAHR Wet Discs / Manual Wet Discs	None / SAHR Wet Discs / Manual Wet Discs
Spin-On Oil Filter Options	Vertical / Remote	Vertical / Remote
Electric System Voltage	12V	12V
Differential Lock Solenoid	On Control Valve Assy	On Control Valve Assy
Power Brake in/out Ports	15 bar nom.	15 bar nom.
Speed Sensor	Yes	Yes
Temperature Sensor	Yes	Yes
Pressure Sensor	Yes	Yes
Electrical Harness	Available	Available

All specifications can be subject to changes without prior advice by Carraro

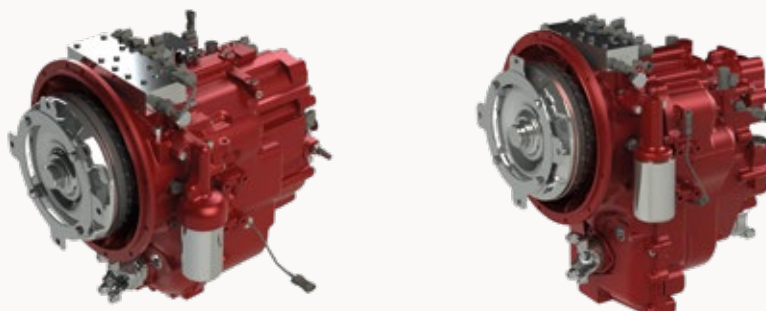

# Torque Converter Transmissions Power Shift

MAIN TECHNICAL DATA	TCB90 PS 4WD	TCB90 PS Coaxial
Power Rating	90 kW @ 2,200 rpm	90 kW @ 2,200 rpm
Max input Torque	750 Nm	750 Nm
Max input speed	2,400 rpm	2,400 rpm
Internal Pump Type	Gear	Gear
Engine Flywheel Interface	SAE 3	SAE 3
Output Flange Type	Yoke 1410	Yoke 1410
2WD output drop from Engine	188 mm	350 mm
4WD output drop from Engine	350 mm	350 mm
Vehicle Pump Interface	SAE C	SAE C
Torque Converter Size	W300	W300
Speed Gear	4 Fwd + 4 Rev	4 Fwd + 4 Rev
Fwd/Rev Ratios Option	1:1 / 1:0.829	1:1 / 1:0.829
FWD Speed Gear Ratios	1 <sup>st</sup> 2 <sup>nd</sup> 3 <sup>rd</sup> 4 <sup>th</sup> 5.533:1 3.359:1 1.533:1 0.811:1	1 <sup>st</sup> 2 <sup>nd</sup> 3 <sup>rd</sup> 4 <sup>th</sup> 4.426:1 2.687:1 1.226:1 0.649:1
MFD Ratio Options	0.804:1	1:1
Electronic Control	Yes	Yes
Reverser	Power Reverse	Power Reverse
Gear Shifting	Power Shift	Power Shift
Direct Drive Option	Yes	Yes
MFD Connection Options	SAHR Wet Clutch	Permanent / SAHR Wet Clutch
Parking Brake Options	None / SAHR Wet Discs / Manual Wet Discs	None / SAHR Wet Discs / Manual Wet Discs
Spin-On Oil Filter Options	Horizontal / Vertical / Remote	Horizontal / Vertical / Remote
Electric System Voltage	12V	12V
Differential Lock Solenoid	On Control Valve Assy	On Control Valve Assy
Power Brake in/out Ports	15 bar nom.	15 bar nom.
Speed Sensor	Yes	Yes
Temperature Sensor	Yes	Yes
Pressure Sensor	Yes	Yes
Electrical Harness	Available	Available

All specifications can be subject to changes without prior advice by Carraro

